HERCULES® Plus

Panel

- Quality coating 10 years warranty

WARRANTY 10 YEARS MRT

· Hot-dipped galvanized : 40 gr/m2 minimum

· Polyester powder coating by microcrystalline phosphatising: 100 microns minimum

- 10 standard RAL colours to choose from:

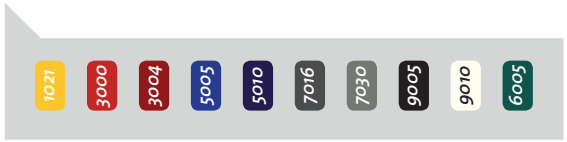

- Oxidon: a metallic texture for a deluxe finish

- Also available in hot dipped galvanized

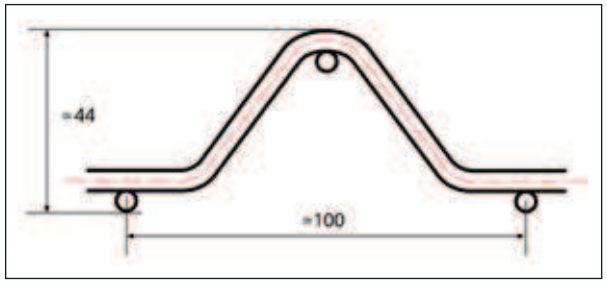

THE "PLUS" BEND

MORE THAN TWICE RIGIDITY

With its high rigidity, the HERCULES® PLUS panel is ideal for industrial sites.

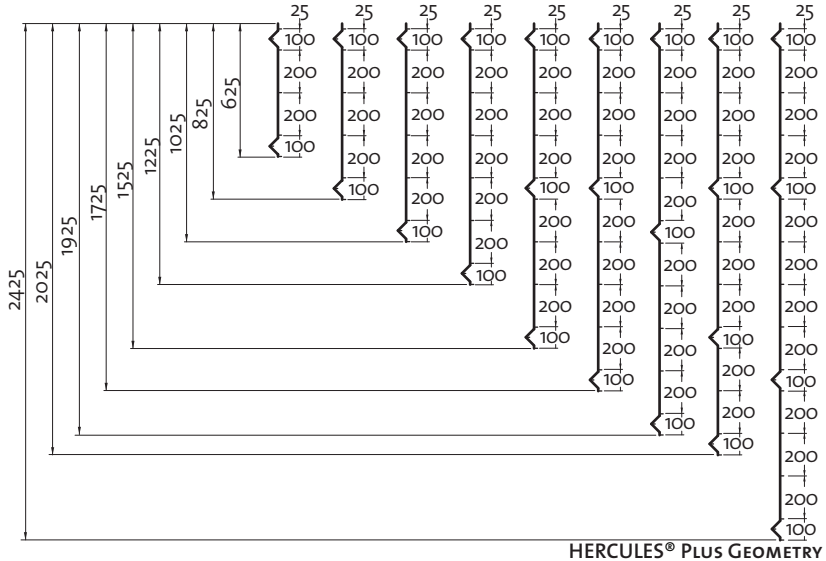

HERCULES® Plus Geometry

Diameter in mm	Mesh in mm	Length in mm	Height in mm	Number of bends	Posts
5.00	200 x 55	2500 3000	625 825 1025 1225 1525 1725 1925 2025	2 2 2 2 3 3 3 4	HERCULES® QUICKFIX® EASYCLIP® PROFIX®*
		2500	2425	4	HERCULES® EASYCLIP®

* not recommended for panels of 3000 mm