2009 TENAX GRIFON

PP Bi-oriented net, square mesh. Thanks to its special production process, it is a light, competitive product, highly tear- and mechanic-resistant.
Rolls available 1-1.20 m high and 30-50 m long

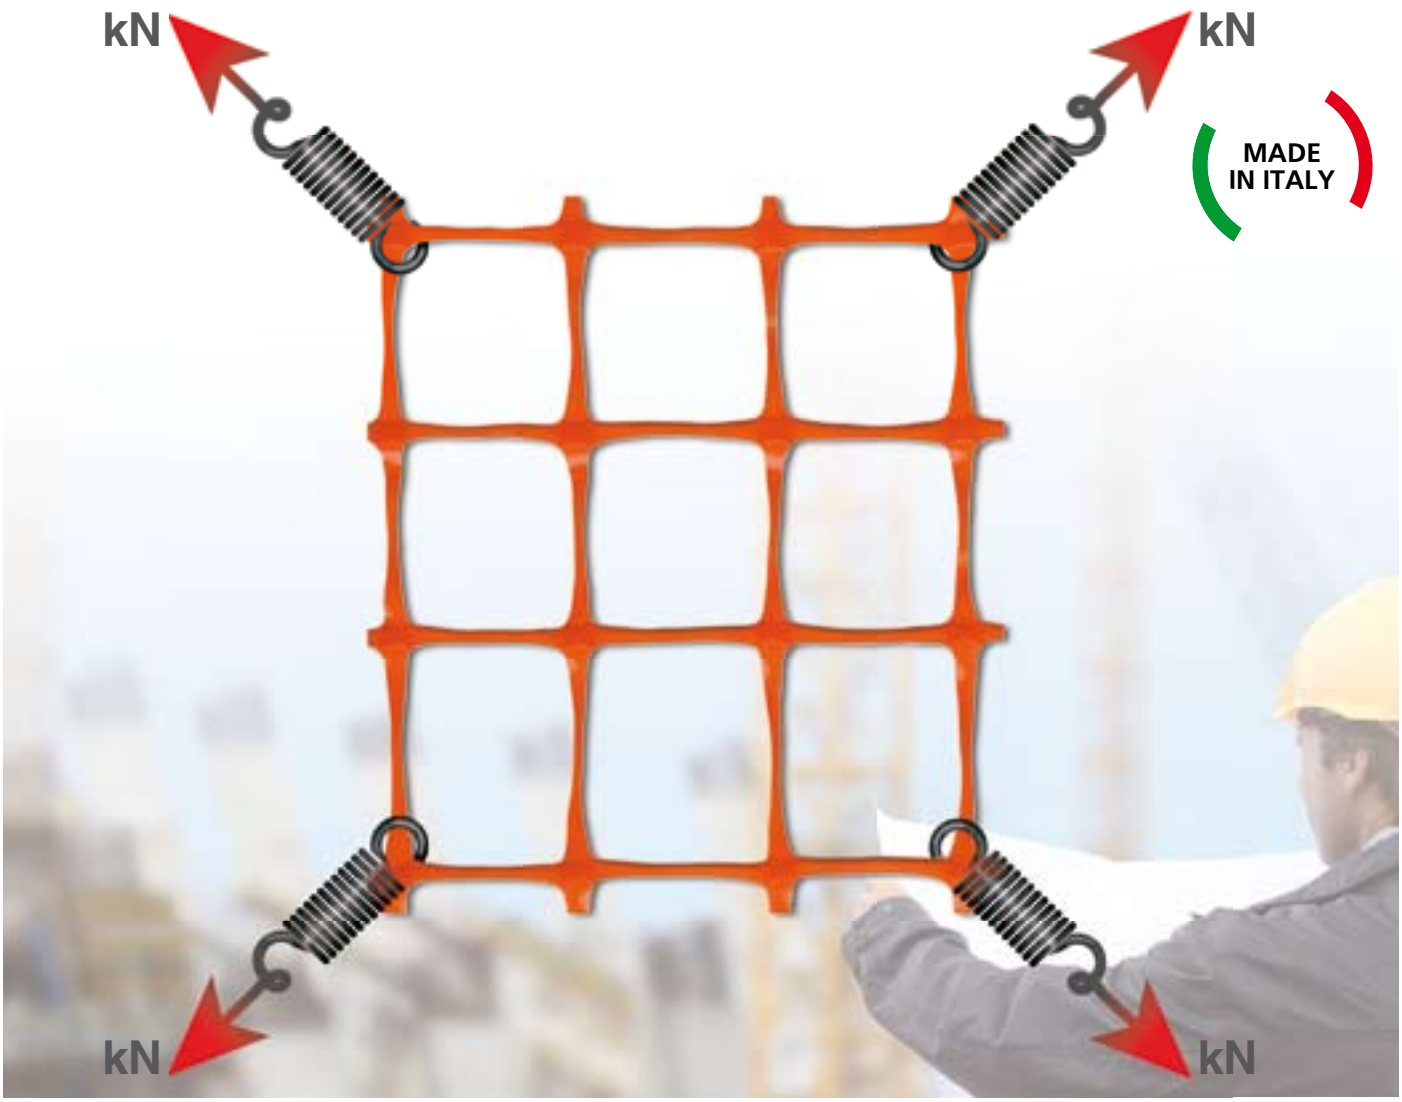

	TRADITIONAL BUILDING SITE FENCES			GRIFON
Weight	100 g/m²	160 g/m²	200 g/m²	**50 g/m²**
Polymer	PE	PE	PE	**PP**
Production process	Extruded	Extruded	Extruded	**Extruded and Bi-oriented**
Mesh size	70x50 mm	55x55 mm	55x55 mm	**50x60 mm**
Tensile strength	MD: 0,5 kN/m TD: 0,4 kN/m	MD: 1,2 kN/m TD: 1,2 kN/m	MD: 1,6 kN/m TD: 1,6 kN/m	**MD: 2,0 kN/m TD: 4,0 kN/m**
Yeld point elongation	MD: 4% TD: 3%	MD: 5% TD: 5%	MD: 6% TD: 6%	**MD: 7,5% TD: 14%**

TENAX EDILIZIA

TENAX SpA
Via dell'Industria, 3 - 23897 Viganò (LC) - ITALIA
Tel. +39.039.9219300 - Fax +39.039.9219290
customer.service@tenax.net - **www.tenax.net**